



Engine Driven Utility Pumps

NEW 1" HIGH RPM MODEL AVAILABLE

- **Cast Iron or Aluminum Construction**
- **Buna-N Mechanical Seal and O-Ring**
- **1" to 1.5" NPT Port Sizes**
- **Self-Priming up to 20 Ft.**
- **Semi-Open, Clog Resistant Impellers**
- **Engine Options: Honda GXH50, B&S 4-Cycle and Tecumseh 2-Cycle**
- **Pumps Include Carry Handle & Steel Base**



1.5" Utility Pump (Cast Iron)


The AMT line of Engine Driven Utility pumps offers economy, durability, portability and performance all in one neat package. Ideal for general purpose dewatering, irrigation, spraying, washdown and agricultural applications. Model 2858-95 is cast iron and features a self-priming plastic impeller coupled to a B&S 4-cycle engine. Models 4381-96 and 4382-96 are aluminum construction and feature (2) garden hose adapters, and a built-in check valve.

AMT Engine Driven Dewatering pumps are reliable, cost effective and low maintenance. Many are readily available "Off-the-Shelf" for fast 24 hour shipment. For use with non-flammable liquids which are compatible with pump component materials.

INDUSTRIAL DUTY




1" Utility Pump (Aluminum)

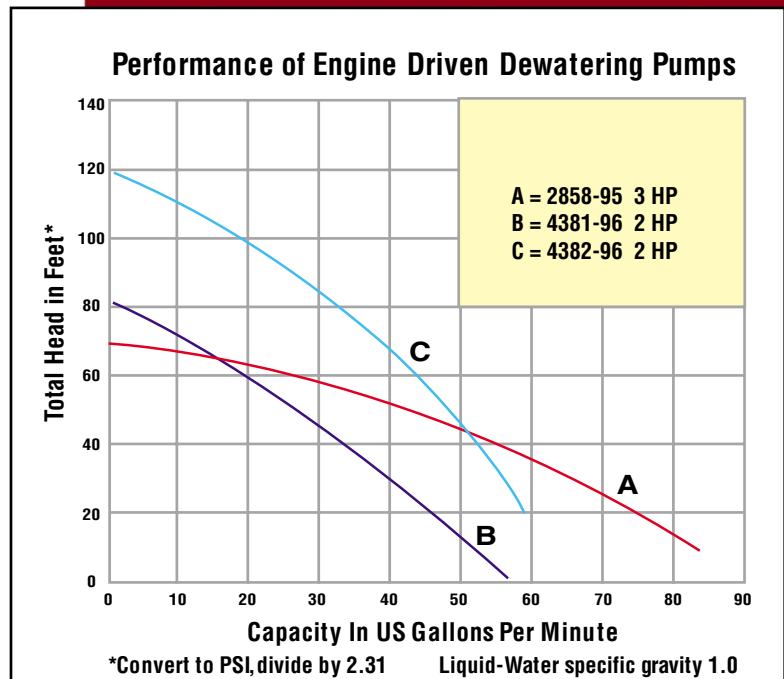

Engine Driven Utility Pumps

1" Dewatering Pump

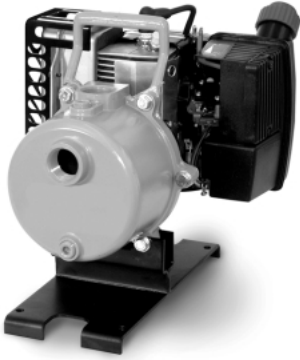

Model	Curve	Driver	Ship Wt.	Run Time	Tank size
4381-96*	B	Tecumseh 2-Cycle	18 lbs.	30 min.	20 oz.
4382-96	C	Honda GXH50	25 lbs.	60 min.	1.3 qt.


Construction – Cast Aluminum
*Includes 8 oz. can of 2-cycle oil

Solids Handling – 3/32"

Standard Features

- Two Garden Hose Adapters
- Buna-N Mechanical Seal
- O-Ring Casing Seal
- Self-primes to 15 ft. with Built-in Check Valve
- Replaceable Volute
- Max Temperature 180° F
- Max Working Pressure 60 PSI
- Delivers Up to 52 PSI
- Maximum 59 GPM

1.5" Dewatering Pump (4 Cycle)

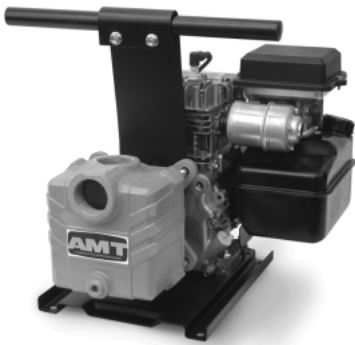


Model	Curve	Driver	Ship Wt.	Run Time	Tank size
2858-95	A	B&S 525	57 lbs	180 min.	3 qt.

Construction – Cast Iron

Solids Handling – 1/4"

Standard Features

- Two 1.5" NPT Pipe Nipples
- Buna-N Mechanical Seal and O-Ring
- O-Ring Casing Seal
- Self-primes to 20 ft.
- Semi-Open, Clog Resistant Impeller
- Stainless Steel Shaft Sleeve
- Max. Temperature 180° F
- Max Working Pressure 60 PSI
- Delivers up to 31 PSI
- Dual Volute Design
- Maximum 85 GPM

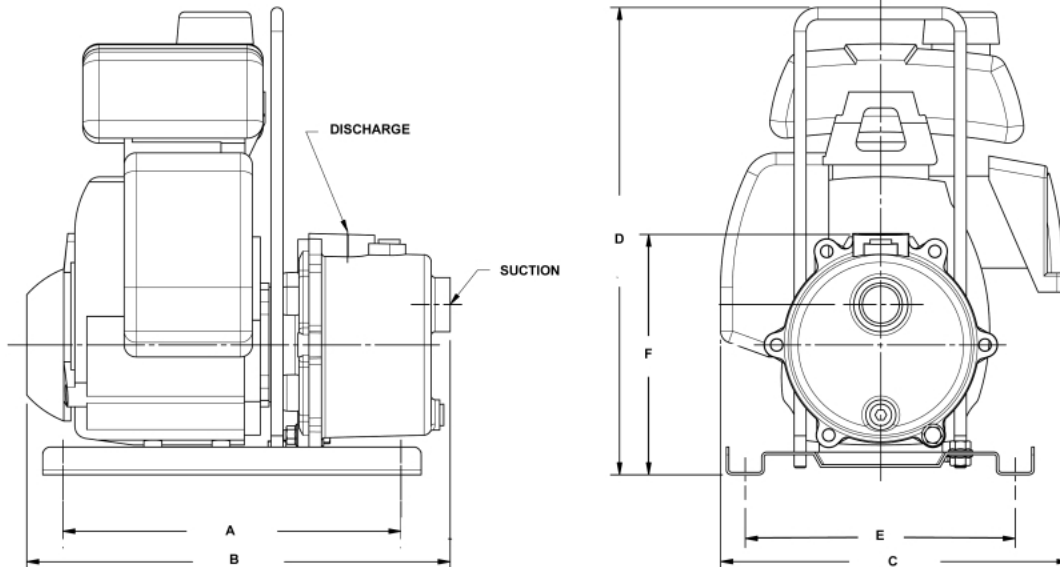

Model	Curve	A	B	C	D	E	F	Suc	Dis
2858-95	A	10.6	16.6	17.4	16.1	8.4	8.5	1.5"	1.5"
4381-96	B	9	13.4	10.5	11.8	4.4	9.1	1"	1"
4382-96	C	10.6	13.2	10.9	14.6	8.4	7.5	1"	1"

(*) This dimension may vary due to engine manufacturer's specifications.
NOTE: Dimensions have a tolerance of $\pm 1/8"$.